




TBi SR 400

Vodeno hlađenje

100% (10 min.)
AC: 315A
DC: 450A
Ø 1.0-4.8 mm

TBi SR 400

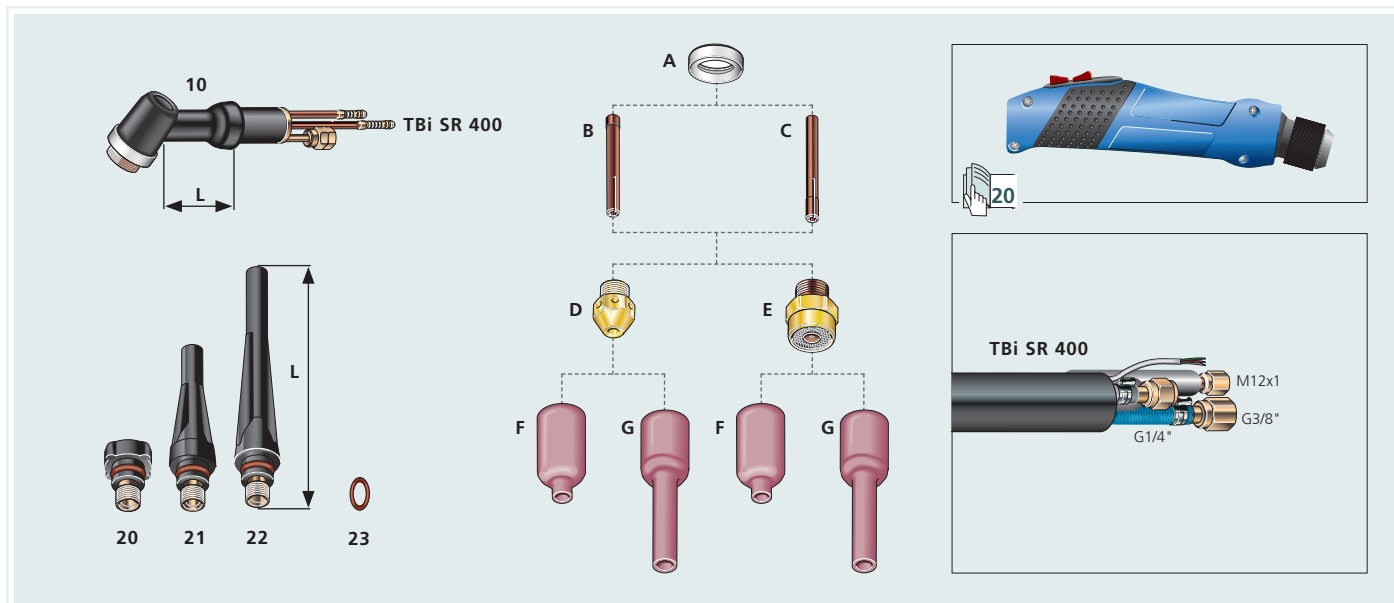

Rezervni dijelovi

| | | | | |
|----|------------------|---------|------------|---------------------|
| 10 | Tijelo gorionika | SR 400 | L = 50 mm | 405P400802 |
| 20 | Kapa | Kratka | L = 24 mm | 57Y04 402P170100 |
| 21 | Kapa | Srednje | L = 58 mm | 57Y05 402P170150 |
| 22 | Kapa | Duga | L = 140 mm | 57Y02 402P170200 |
| 23 | O - ring | | | 98W18 365P200096 |
| A | Izolator | | | 18NG 405P400001 |

| | Ø 1.0 mm Ø 0.040" | Ø 1.6 mm Ø 1/16" | Ø 2.4 mm Ø 3/32" | Ø 3.2 mm Ø 1/8" | Ø 4.0 mm Ø 5/32" | Ø 4.8 mm Ø 3/16" |
|--------------------------------|-----------------------|----------------------------|----------------------|----------------------------|-----------------------|-----------------------|
| Držac Wolfram elektrode | | | | | | |
| ▶ B | Standard, L = 50 mm | 10N22 402P170500 | 10N23 402P170502 | 10N24 402P170503 | 10N25 402P170504 | 54N20 402P170505 |
| | | | | | | 18C36 405P400506 |
| C | Heavy duty, L = 50 mm | - | - | - | 10N25HD 405P400504 | 54N20HD 405P400505 |
| Nosač Wolfram elektrode | | | | | | |
| ▶ D | L = 19.5 mm | Ø 1.0-3.2 mm 405P401000 | | Ø 3.2-4.8 mm 405P401001 | | |
| Plinsko sito | | | | | | |
| E | L = 21.3 mm | 18GL04 405P401301 | 18GL16 405P401302 | 18GL32 405P401303 | 18GL18 405P401304 | 18GL53 405P401305 |
| | | | | | | 18GL36 405P401306 |

| | No. 4 Ø 6.5 mm Ø 1/4" | No. 5 Ø 8.0 mm Ø 5/16" | No. 6 Ø 9.5 mm Ø 3/8" | No. 7 Ø 11 mm Ø 7/16" | No. 8 Ø 12.5 mm Ø 1/2" | No. 11 Ø 17.5 mm Ø 11/16" |
|--------------------------|-----------------------------|------------------------------|-----------------------------|-----------------------------|------------------------------|---------------------------------|
| Keramičke sapnice | | | | | | |
| ▶ F | Standard, L = 42.0 mm | 54N18 401P222200 | 54N17 401P222201 | 54N16 401P222202 | 54N15 401P222203 | 54N14 401P222204 |
| | | | | | | 54N19 401P222206 |
| G | Standard, L, L=76.0 mm | 54N18 L 401P222211 | 54N17 L 401P222207 | 54N16 L 401P222208 | 54N15 L 401P222209 | 54N14 L 401P222210 |
| | | | | | | - |

▶ = Standard